


Overview

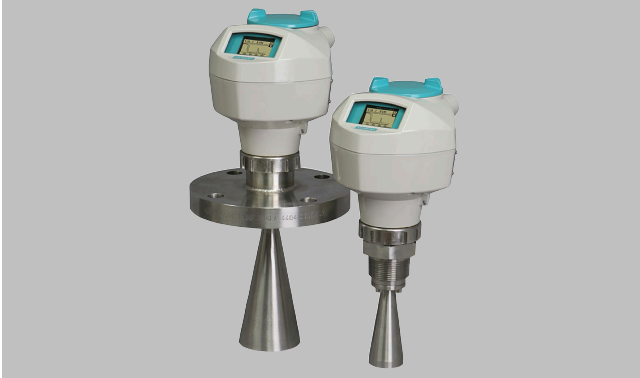

SITRANS LR250 is a 2-wire, 25 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in storage and process vessels including high temperature and pressure, to a range of 20 m (66 ft).

Benefits

- Graphical local user interface (LUI) makes operation simple with plug-and-play setup using the intuitive Quick Start Wizard
- LUI displays echo profiles for diagnostic support
- 25 GHz high frequency allows for small antennas for easy mounting in nozzles
- Insensitive to mounting location and obstructions, and less sensitive to nozzle interference
- Short blanking distance for improved minimum measuring range to 50 mm (2 inch) from the end of the antenna
- Communication using HART or PROFIBUS PA
- Process Intelligence signal processing for improved measurement reliability and Auto False-Echo Suppression of fixed obstructions
- Programming using infrared Intrinsically Safe handheld programmer or over a network using SIMATIC PDM, Emerson AMS, or Field Device Tools such as PACTware or Fieldcare via SITRANS DTM
- Functional Safety (SIL 2). Device suitable for use in accordance with IEC 61508 and IEC 61511
- 3 mm (0.118 inch) accuracy in accordance with IEC 60770-1
- Suitable for API 2350

Application

SITRANS LR250 includes a graphical local user interface (LUI) that improves setup and operation by including an intuitive Quick Start Wizard, and echo profile displays for diagnostic support. Startup is easy using the Quick Start wizard with a few parameters required for basic operation.

The 25 GHz frequency creates a narrow, focused beam allowing for smaller horn antenna options and decreasing sensitivity to obstructions.

SITRANS LR250's unique design allows safe and simple programming using the Intrinsically Safe handheld programmer without saving to open the instrument's lid.

SITRANS LR250 measures superbly on low dielectric media, and in small vessels, as well as tall and narrow vessels.

- Key Applications: liquid bulk storage tanks, process vessels, vaporous liquids, high temperatures, low dielectric media and applications with functional safety requirements


SITRANS LR250 Horn Antenna

Configuration

Installation


Note:

- Beam angle is the width of the cone where the energy density is half of the peak energy density.
- The peak energy density is directly in front of and in line with the horn antenna.
- There is a signal transmitted outside of the beam angle; therefore false targets may be detected.
- Use largest possible antenna.




Mounting on bypass

Orient front or back of device toward vent.




Mounting on stilling well

Orient front or back of device toward stillpipe slots.




Use largest horn size possible in pipe.

Mounting on vessel



Mounting on a nozzle



SITRANS LR250 installation, dimensions in mm (inch)

Selection and ordering data

		Article No.									
SITRANS LR250 Radar level transmitter		7ML5431- ● ● ● ● 0 - ● ● ● ●									
Continuous, non-contact, 20 m (66 ft) range, for liquids and slurries.											
Click on the Article No. for the online configuration in the PIA Life Cycle Portal.											
Process Connection and Antenna Material											
316L (1.4435 or 1.4404) stainless steel, PTFE emitter, FKM seal ¹⁾		0									
316L (1.4435 or 1.4404) stainless steel, PTFE emitter, FFKM seal ¹⁾		1									
Process Connection Type											
Threaded connection 316L											
1½" NPT (ASME B1.20.1) (tapered thread) ³⁾		A		A							
R 1½" [(BSPT), EN 10226-1] (tapered thread) ³⁾		A		B							
G 1½" [(BSPP), EN ISO 228-1] (parallel thread) ³⁾		A		C							
2" NPT (ASME B1.20.1) (tapered thread) ⁴⁾		A		D							
R 2" [(BSPT), EN 10226-1] (tapered thread) ⁴⁾		A		E							
G 2" [(BSPP), EN ISO 228-1] (parallel thread) ⁴⁾		A		F							
3" NPT (ASME B1.20.1) (tapered thread) ⁴⁾		A		G							
R 3" [(BSPT), EN 10226-1] (tapered thread) ⁴⁾		A		H							
G 3" [(BSPP), EN ISO 228-1] (parallel thread) ⁴⁾		A		J							
Flanged connection 316L											
2" Class 150 ASME B16.5, raised face ⁴⁾		B		D							
3" Class 150 ASME B16.5, raised face ⁴⁾		B		E							
4" Class 150 ASME B16.5, raised face ⁴⁾		B		F							
2" Class 300 ASME B16.5, raised face ⁴⁾		C		D							
3" Class 300 ASME B16.5, raised face ⁴⁾		C		E							
4" Class 300 ASME B16.5, raised face ⁴⁾		C		F							
50A 10K JIS B 2220 flat face ⁴⁾		F		A							
80A 10K JIS B 2220 flat face ⁴⁾		F		B							
100A 10K JIS B 2220 flat face ⁴⁾		F		C							
DN 50 PN 16 EN 1092-1 Type B1 raised face ⁴⁾		G		A							
DN 80 PN 16 EN 1092-1 Type B1 raised face ⁴⁾		G		B							
DN 100 PN 16 EN 1092-1 Type B1 raised face ⁴⁾		G		C							
DN 150 PN 16 EN 1092-1 Type B1 raised face ⁴⁾		G		D							
DN 50 PN 40 EN 1092-1 Type B1 raised face ⁴⁾		H		A							
DN 80 PN 40 EN 1092-1 Type B1 raised face ⁴⁾		H		B							
DN 100 PN 40 EN 1092-1 Type B1 raised face ⁴⁾		H		C							
DN 150 PN 40 EN 1092-1 Type B1 raised face ⁴⁾		H		D							
Communication/Output											
PROFIBUS PA ⁵⁾		1									
4 ... 20 mA, HART, start-up at < 3.6 mA		2									
Enclosure/Cable inlet											
Aluminum, Epoxy painted											
2 x ½" NPT		0									
2 x M20 x 1.5		1									
Antenna											
1½" horn		A									
2" horn (fits 2" ASME or DN 50 nozzles)		B									
3" horn (fits 3" ASME or DN 80 nozzles)		C									
4" horn (fits 4" ASME or DN 100 nozzles)		D									
1½" horn with 100 mm extension		E									
2" horn with 100 mm extension		F									
3" horn with 100 mm extension		G									
4" horn with 100 mm extension		H									
Approvals											
Ordinary Locations/General Purpose (Non-Ex), CE, UKCA, CSA, FM, FCC, RED, RCM											
Intrinsically Safe: CSA/FM Class I, Div. 1, Groups A, B, C, D, Class II, Div. 1, Groups E, F, G, Class III T4											
FCC, Industry Canada		A B									

SITRANS LR250 Horn Antenna

Selection and ordering data (continued)

SITRANS LR250 Radar level transmitter Continuous, non-contact, 20 m (66 ft) range, for liquids and slurries.	Article No. 7ML5431- ● ● ● ● 0 - ● ● ● ●
Intrinsically Safe: ATEX II 1G Ex ia IIC T4 Ga, ATEX II 1D Ex ia ta IIIC T100°C Da; UKEX II 1G Ex ia IIC T4 Ga, UKEX II 1D Ex ia ta IIIC T100°C Da; IECEX Ex ia IIC T4 Ga, IECEX 1D Ex ia ta IIIC T100°C Da; INMETRO Ex ia IIC T4 Ga, INMETRO Ex ia ta IIIC T100°C Da, IP67/IP68; EAC Ex OEx ia IIC T4 Ga X, EAC Ex OEx ia ta IIIC T100°C Da X; CE, UKCA, RED, RCM	C
Non-incendive: CSA/FM Class I, Div. 2, Groups A, B, C, D T5, FCC, Industry Canada	D
Increased Safety / Non Sparking: ATEX II 3G Ex ec IIC T4 Gc; UKEX II 3G Ex ec IIC T4 Gc; EAC Ex 2Ex nA IIC T4 Gc X; CE, UKCA, RED, RCM	E
Increased Safety: ATEX II 1/2 GD, 1D, 2D, Ex eb mb ia IIC T4 Ga/Gb; UKEX II 1/2 GD, 1D, 2D, Ex eb mb ia IIC T4 Ga/Gb; IECEX Ex eb ia mb IIC T4 Ga/Gb; INMETRO Ex e ia mb IIC T4 Ga/Gb, INMETRO Ex ia ta IIIC T100°C Da, IP67/IP68; EAC Ex Ga/Gb Ex ia/e+mb IIC T4 X; CE, UKCA, RED, RCM ⁶⁾	F
Flameproof: ATEX II 1/2 GD, 1D, 2D, Ex db mb ia IIC T4 Ga/Gb; ATEX II 1/2 GD, 1D, 2D, Ex ia ta IIIC T100°C Da; UKEX II 1/2 GD, 1D, 2D, Ex db mb ia IIC T4 Ga/Gb; UKEX II 1/2 GD, 1D, 2D, Ex ia ta IIIC T100°C Da; IECEX Ex db mb ia IIC T4 Ga/Gb, IECEX Ex ia ta IIIC T100°C Da; INMETRO Ex d ia mb IIC T4 Ga/Gb, INMETRO Ex ia ta IIIC T100°C Da, IP67/IP68; EAC Ex Ga/Gb Ex ia/db+mb IIC T4 X, EAC Ex Ex ia ta IIIC T100°C Da; CE, UKCA, RED, RCM ⁶⁾	G
Explosion proof: CSA/FM Class I, II, and III, Div. 1, Groups A, B, C, D, E, F, G, FCC, Industry Canada ⁶⁾	H
Non Sparking: NEPSI Ex nA IIC T4 Gc	K
Intrinsically Safe: NEPSI Ex ia IIC T4 Ga, Ex iaD tD A20 IP67 T100 °C	L
Flameproof: NEPSI Ex d ia mb IIC T4 Ga/Gb, Ex iaD tD A20 IP67 T100 °C ⁶⁾	M
Increased Safety: NEPSI Ex e ia mb IIC T4 Ga/Gb, Ex iaD tD A20 IP67 T100 °C ⁶⁾	N
Pressure rating	
Rating per Pressure/Temperature curves in manual	0
0.5 bar (7.25 psi g) maximum ⁷⁾	1

- 1) Available with process connection options AA ... HD and Antenna Versions A ... H only.
- 2) Available with process connection options JA ... MH and Antenna Versions J ... P only.
- 3) Not available with Antenna options B, C, D, F, G, H.
- 4) Not available with Antenna options A and E.
- 5) Available with Approval options A, B, C, D, K, and L.
- 6) Available only with Communications option 2.
- 7) Available with Process Connection and Antenna Material 0, 1, 2, and 3 only.

Selection and Ordering data	Order code
Further designs	
Please add "-Z" to Article No. and specify Order code(s).	
Plug M12 with mating Connector ¹⁾²⁾³⁾	A50

Selection and Ordering data	Order code
Plug 7/8" with mating Connector ²⁾³⁾⁴⁾	A55
Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 27 characters); specify in plain text	Y15
Manufacturer's Test Certificate: M to DIN 55350, Part 18 and to ISO 9000	C11


Selection and ordering data (continued)




Selection and Ordering data	Order code
Material inspection certificate 3.1 of EN 10204	C12
Functional Safety (SIL 2). Device suitable for use in accordance with IEC 61508 and IEC 61511 ³⁾⁵⁾	C20
Namur NE43 compliant, device preset to failsafe < 3.6 mA ⁵⁾	N07

Accessories	Article No.
Operating Instructions	
All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation	
Accessories	
Handheld programmer, Intrinsically safe, EEx ia	7ML1930-1BK
HART modem with USB interface	7MF4997-1DC
One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F), HART (two are required)	7ML1930-1AP
One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F), PROFIBUS PA (two are required) ⁶⁾	7ML1930-1AQ
FDA approved FKM O-ring for 2" G (BSPP) process connections -28 ... +80 °C (-28 ... +176 °F)	7ML1830-3AN
SITRANS RD100, loop powered display - see Chapter 7	7ML5741-.....-
SITRANS RD150, remote digital display for 4 ... 20 mA and HART devices - see Chapter 7	7ML5742-.....-....
SITRANS RD200, universal input display with Modbus conversion - see Chapter 7	7ML5740-.....-
SITRANS RD300, dual line display with totalizer and linearization curve and Modbus conversion - see Chapter 7	7ML5744-.....-
For applicable back up point level switch - see point level measurement section	

- 1) Available with enclosure option 1 only.
- 2) To be used with communication options 1 and 3 only. Connector has IP67 rating.
- 3) Available with approval options A and B. Available with approval option C for use on intrinsically safe applications only. Not rated for dust Ex.
- 4) Available with enclosure option 0 only.
- 5) Applicable to communication option 2 only.
- 6) For use with communication options 1 and 3 only.

Selection and Ordering Data

SITRANS LR250 Spare parts	
SITRANS LR250 horn version enclosures (PROFIBUS PA models)	
SITRANS LR250 horn version enclosure with board stack, NPT cable inlet, approval option A, with PROFIBUS PA communication, no process connection	A5E01156836
SITRANS LR250 horn version enclosure with board stack, M20 cable inlet, approval option A, with PROFIBUS PA communication, no process connection	A5E01156838
SITRANS LR250 horn version enclosure with board stack, M20 cable inlet, approval option B, with PROFIBUS PA communication, no process connection	A5E01156841
SITRANS LR250 horn version enclosure with board stack, NPT cable inlet, approval option C, with PROFIBUS PA communication, no process connection	A5E01156843

SITRANS LR250 Spare parts	
SITRANS LR250 horn version enclosure with board stack, M20 cable inlet, approval option C, with PROFIBUS PA communication, no process connection	A5E01156844
SITRANS LR250 horn version enclosure with board stack, NPT cable inlet, approval option D, with PROFIBUS communication, no process connection	A5E01156846
SITRANS LR250 horn version enclosure with board stack, M20 cable inlet, approval option D, with PROFIBUS PA communication, no process connection	A5E01156848
SITRANS LR250 horn version enclosures (< 3.6 mA start-up HART)	
SITRANS LR250 horn version enclosure with board stack, M20 cable inlet, approval option A, with HART communication start-up at < 3.6 mA, no process connection	A5E02956317
SITRANS LR250 horn version enclosure with board stack, M20 cable inlet, approval option C, with HART communication start-up at < 3.6 mA, no process connection	A5E02956319
SITRANS LR250 horn version enclosure with board stack, M20 cable inlet, approval option E, with HART communication start-up at < 3.6 mA, no process connection	A5E02956320
SITRANS LR250 horn version enclosure with board stack, M20 cable inlet, approval option F, with HART communication start-up at < 3.6 mA, no process connection	A5E02956322
SITRANS LR250 horn version enclosure with board stack, M20 cable inlet, approval option G, with HART communication start-up at < 3.6 mA, no process connection	A5E02956323
LR250 horn version enclosure with board stack, NPT cable inlet, approval option A, with HART communication start-up at < 3.6 mA, no process connection	A5E03441096
LR250 horn version enclosure with board stack, NPT cable inlet, approval option B, with HART communication start-up at < 3.6 mA, no process connection	A5E03441097
LR250 horn version enclosure with board stack, NPT cable inlet, approval option H, with HART communication start-up at < 3.6 mA, no process connection	A5E03441099
Sun shield for SITRANS LR250 enclosure, stainless steel	
	A5E39142556
SITRANS LR250 horn antenna and extension kits	
38 mm (1.5 inch) horn antenna kit, 1.5 inch Process Connections only	A5E01151539
100 mm (4 inch) horn antenna extension kit, 1.5 inch process connections only	A5E01151553
50 mm (2 inch) stainless steel 316L horn antenna kit	A5E01151569
75 mm (3 inch) stainless steel 316L horn antenna kit	A5E01151571
100 mm (4 inch) stainless steel 316L horn antenna kit	A5E01151573
100 mm (4 inch) horn antenna extension kit, 50 mm (2 inch), 75 mm (3 inch), and 100 mm (4 inch) process connection	A5E01151577
5 Dupont 1Gr Polyback, PTFE grease kit	A5E01151626
SITRANS LR250 lid with O-ring	A5E02465410
Ex-proof plugs	
Ex-proof plugs kit, 1/2" NPT, qty 5	A5E39979991
Ex-proof plugs kit, M20, qty 5	A5E39979992
Emitter kit for SITRANS LR250 horn antenna	
Emitter kit for horn antenna	A5E39242718

SITRANS LR250 Horn Antenna

Selection and ordering data (continued)

For special requests please consult a local sales person. For more information, please visit http://www.automation.siemens.com/aspa_app.

Technical specifications

SITRANS LR250 Horn Antenna	
Mode of operation	
Measuring principle	Radar level measurement
Frequency	K-band (25.0 GHz)
Minimum measuring range	50 mm (2 inch) from end of antenna
Maximum measuring range	20 m (65 ft), antenna dependent
Output	
HART	Version 5.1
• Analog output	4 ... 20 mA
• Accuracy	± 0.02 mA
• Fail-safe	<ul style="list-style-type: none"> • Programmable as high low or hold (loss of echo) • NE 43 programmable
PROFIBUS PA	Profile 3.01
• Function blocks	2 Analog Input (AI)
Performance (according to reference conditions IEC60770-1)	
Maximum measured error	3 mm (0.118 inch)
Influence of ambient temperature	< 0.003 %/K
Rated operating conditions	
Installation conditions	
• Location	Indoor/outdoor
Ambient conditions (enclosure)	
• Ambient temperature	-40 ... +80 °C (-40 ... +176 °F)
• Storage temperature	-40 ... +80 °C (-40 ... +176 °F)
• Installation category	I
• Pollution degree	4
Medium conditions	
Dielectric constant ϵ_r	> 1.6, antenna and application dependent
Process temperature	-40 ... +200 °C (-40 ... +392 °F) (at process connection with FKM O-ring) -20 ... +200 °C (-4 ... +392 °F) (at process connection with FFKM O-ring)
Process pressure	Up to 40 bar g (580 psi g), process connection and temperature dependent. See Pressure/Temperature curves for more information
Design	
Enclosure	
• Material	Aluminum, polyester powder-coated
• Cable inlet	2 x M20 x 1.5 or 2 x 1/2" NPT
Degree of protection	Type 4X/NEMA 4X, Type 6/NEMA 6, IP67, IP68
Weight	< 3 kg (6.6 lb) 3.75 mm (1 1/2 inch) threaded connection with 1 1/2" horn antenna
Display (local)	
Graphic local user interface including quick start wizard and echo profile display	
Antenna	
• Material	316L stainless steel
• Dimensions (nominal horn sizes)	Standard 1.5 inch (40 mm), 2 inch (48 mm), 3 inch (75 mm), 4 inch (95 mm) horn, and optional 100 mm (4 inch) horn extension
Process connections	
• Process connection	1 1/2", 2" or 3" NPT [(Taper), ASME B1.20.1] R 1 1/2", 2" or 3" [(BSPT), EN 10226] G 1 1/2", 2" or 3" [(BSPP), EN ISO 228-1]


Technical specifications (continued)

SITRANS LR250 Horn Antenna	
• Flange connection	2", 3", 4" (ASME 150, 300 lb), 50, 80, 100 mm (PN 16, 40, JIS 10K)
Power supply	
4 ... 20 mA/HART	Nominal 24 V DC (max. 30 V DC) with max. 550 Ω
PROFIBUS PA	<ul style="list-style-type: none"> • 15 mA • Per IEC 61158-2
Certificates and approvals	
General	cCSAUs, CE, UKCA, FM, RCM
Radio	FCC, Industry Canada, RED, RCM
Hazardous	
• Explosion Proof (Brazil)	INMETRO Ex d ia mb IIC T4 Ga/Gb, Ex ia ta IIC T100 °C Da
• Increased Safety (Brazil)	INMETRO Ex e ia mb IIC T4 Ga/Gb, Ex ia ta IIC T100 °C Da
• Intrinsically Safe (Brazil)	INMETRO Ex ia IIC T4 Ga, Ex ia ta IIC T100 °C Da
• Explosion Proof (Canada/USA)	CSA/FM Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III T4
• Intrinsically Safe (Canada/USA)	CSA/FM Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III T4
• Non-incendive (Canada/USA)	CSA/FM Class I, Div. 2, Groups A, B, C, D T5
• Flame Proof/Increased Safety (China)	NEPSI Ex d ia mb IIC T4 Ga/Gb, Ex e ia mb IIC T4 Ga/Gb, Ex iaD tD A20 IP67 T100 °C
• Intrinsically Safe (China)	NEPSI Ex ia IIC T4 Ga, Ex iaD tD A20 IP67 T100 °C
• Non-sparking (China)	NEPSI Ex nA IIC T4 Gc
• Intrinsically Safe (EU)	ATEX II 1G Ex ia IIC T4 Ga, ATEX II 1D Ex ia ta IIC T100°C Da;
• Intrinsically Safe (UK)	UKEX II 1G Ex ia IIC T4 Ga, UKEX II 1D Ex ia ta IIC T100°C Da;
• Intrinsically Safe (International)	IECEx Ex ia IIC T4 Ga, IECEx Ex ia ta IIC T100°C Da;
• Increased Safety - Zone 2 (EU)	ATEX II 3G Ex ec IIC T4 Gc;
• Increased Safety - Zone 2 (UK)	UKEX II 3G Ex ec IIC T4 Gc;
• Non-sparking (EAC)	EAC Ex 2Ex nA IIC T4 Gc;
• Flameproof (EU)	ATEX II 1/2 GD, 1D, 2D, Ex db mb ia IIC Ga/Gb, Ex ia ta IIC T100°C Da;
• Flameproof (UK)	UKEX II 1/2 GD, 1D, 2D, Ex db mb ia IIC Ga/Gb, Ex ia ta IIC T100°C Da;
• Flameproof (International)	IECEx Ex db mb ia IIC T4 Ga/Gb, Ex ia ta IIC T100°C Da;
• Increased Safety - Zone 1 (EU)	ATEX II 1/2 GD, 1D, 2D, Ex eb mb ia IIC T4 Ga/Gb, Ex ia ta IIC T100°C Da;
• Increased Safety - Zone 1 (UK)	UKEX II 1/2 GD, 1D, 2D, Ex eb mb ia IIC T4 Ga/Gb, Ex ia ta IIC T100°C Da;
• Increased Safety - Zone 1 (International)	IECEx Ex eb mb ia IIC T4 Ga/Gb, Ex ia ta IIC T100°C Da
• Explosion Proof (Russia/Kazakhstan)	EAC Ex d
• Increased Safety (Russia/Kazakhstan)	EAC Ex e

Technical specifications (continued)

SITRANS LR250 Horn Antenna	
<ul style="list-style-type: none"> Intrinsically Safe (Russia/Kazakhstan) Marine 	EAC Ex ia <ul style="list-style-type: none"> Lloyd's Register of Shipping ABS Type Approval
<ul style="list-style-type: none"> Functional Safety 	SIL-2 suitable in accordance with IEC 61508/61511
Programming Intrinsically Safe Siemens handheld programmer <ul style="list-style-type: none"> Approvals for handheld programmer 	Infrared receiver IS model: ATEX II 1 GD Ex ia op is IIC T4 Ga ATEX II 1 GD Ex ia op is IIIC T135°C Da UKEX II 1 GD Ex ia op is IIC T4 Ga UKEX II 1 GD Ex ia op is IIIC T135°C Da Ta = -20 ... +50°C CSA/FM Class I, II, III, Div. 1, Groups A, B, C, D, E, G, T6 Ta = 50°C IECEx SIR 09.0073
Handheld communicator	HART communicator 375/475
PC	<ul style="list-style-type: none"> SIMATIC PDM Emerson AMS SITRANS DTM (for connection into FDT such as PACTware or Fieldcare)
Display (local)	Graphic local user interface including quick start wizard and echo profile displays

Characteristic curves


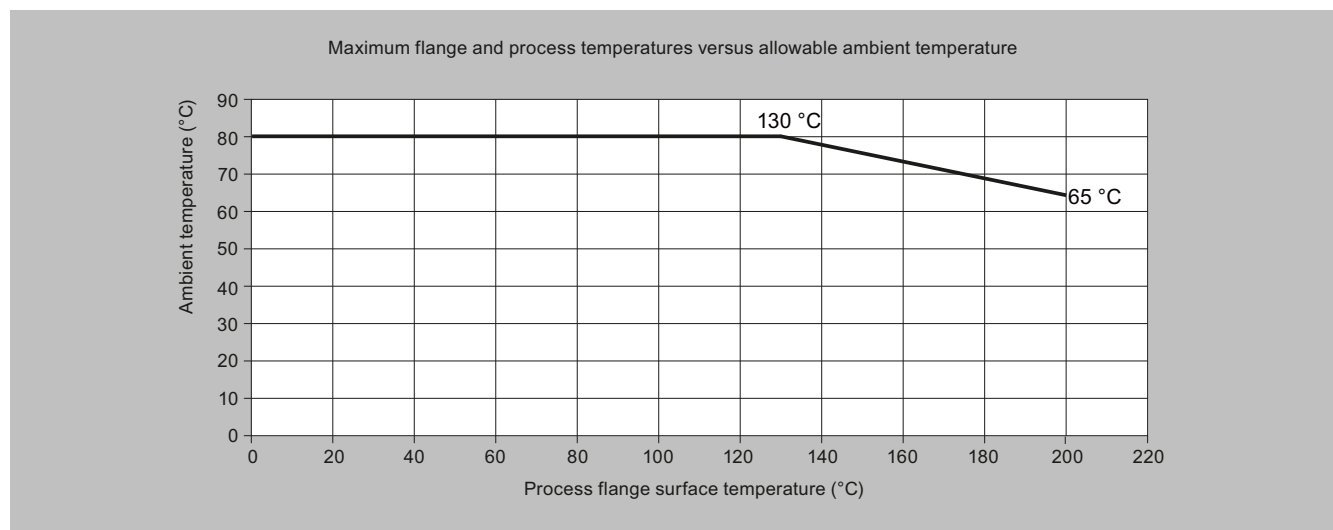


SITRANS LR250 ambient/process flange surface temperature curve

SITRANS LR250 Horn Antenna

Dimensional drawings

Threaded Horn Antenna

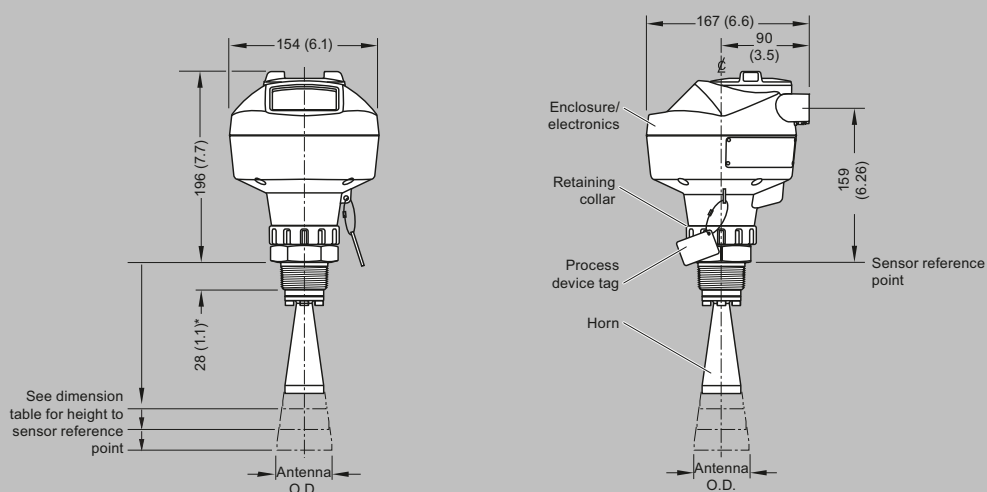


*28 mm (1.1) for 1.5 inch and 2 inch, 42 mm (1.65) for 3 inch

Antenna Type	Antenna O.D.	Height to sensor reference point			Beam angle	Measurement range
		1-1/2" threaded connection	2" threaded connection	3" threaded connection		
1.5" horn	39.8 (1.57)	135 (5.3)	N/A	N/A	19 degrees	10 m (32.8 ft)
2" horn	47.8 (1.88)	N/A	166 (6.55)	180 (7.09)	15 degrees	20 m (65.6 ft)
3" horn	74.8 (2.94)	N/A	199 (7.85)	213 (8.39)	10 degrees	20 m (65.6 ft)
4" horn	94.8 (3.73)	N/A	254 (10)	268 (10.55)	8 degrees	20 m (65.6 ft)

SITRANS LR250 Threaded Horn Antenna, dimensions in mm (inch)

Dimensional drawings (continued)

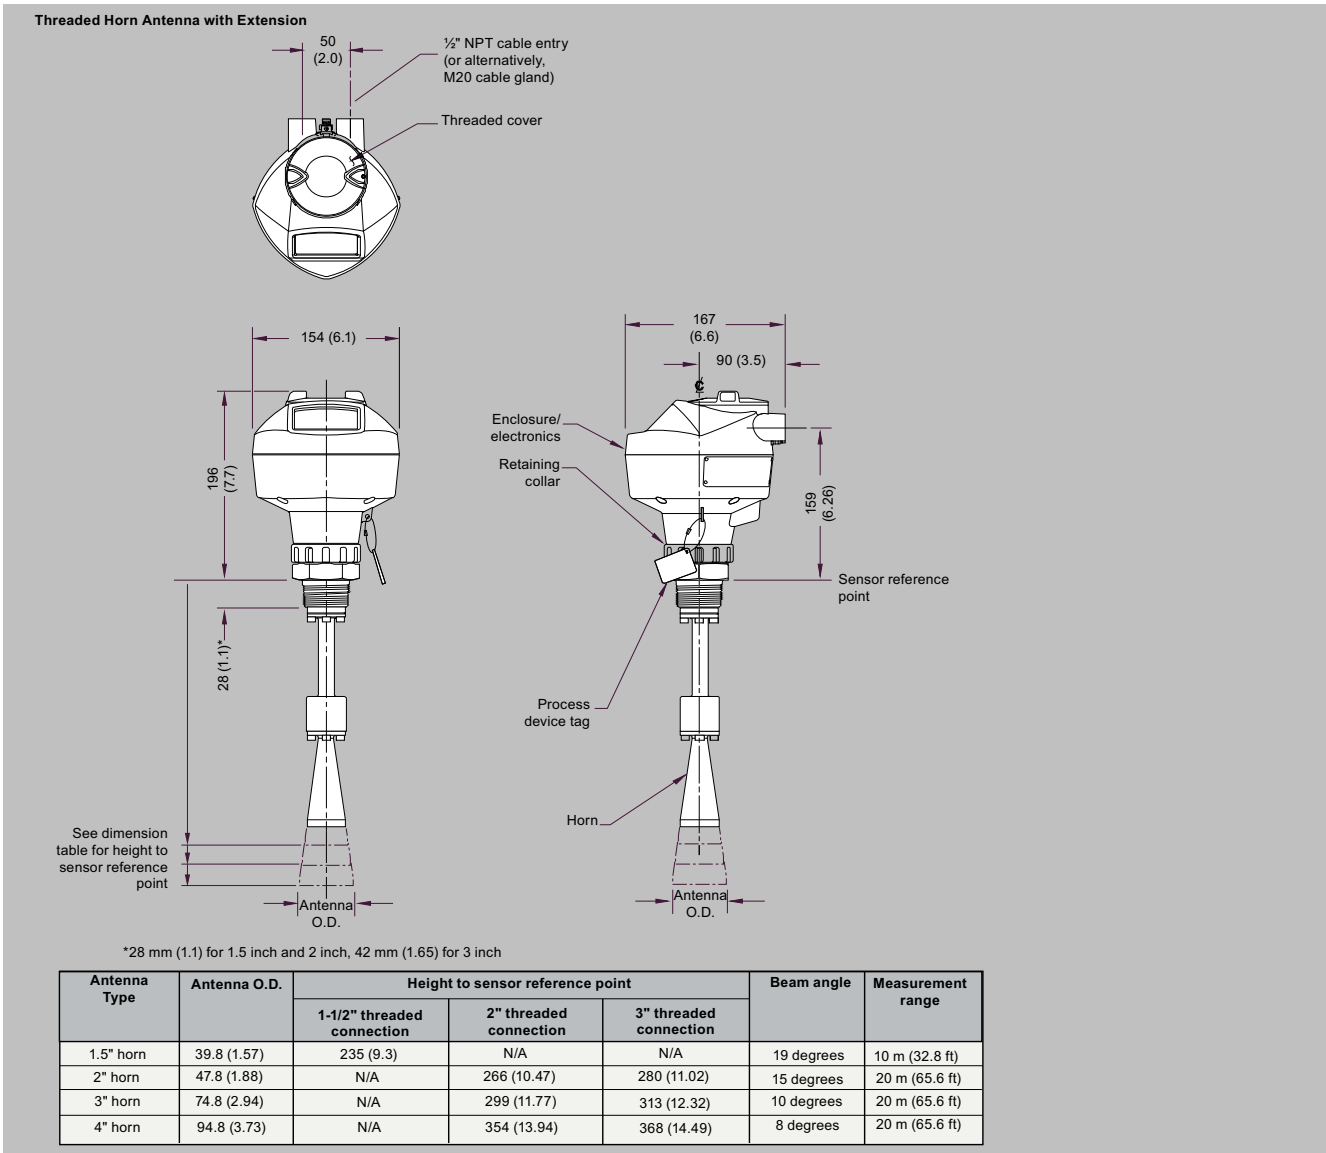


SITRANS LR250 Threaded Horn Antenna with extension, dimensions in mm (inch)

SITRANS LR250 Horn Antenna

Dimensional drawings (continued)

Flanged Horn

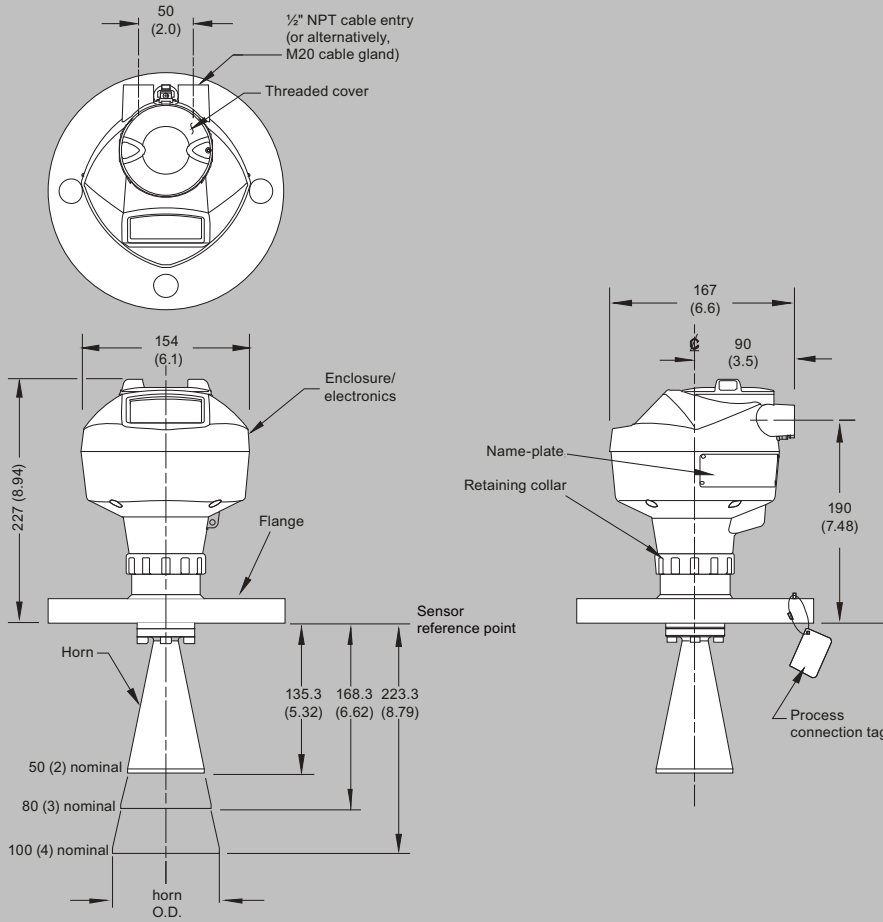


Nominal Horn Size	Horn O.D.	Height to sensor reference point		Beam angle	Measurement range
		Stainless steel flange raised or flat-faced	Optional alloy flange		
50 (2)	47.8 (1.88)	135.3 (5.32)	138.3 (5.44)	15 degrees	20 m (65.6 ft)
80 (3)	74.8 (2.94)	168.3 (6.62)	171.3 (6.74)	10 degrees	20 m (65.6 ft)
100 (4)	94.8 (3.73)	223.3 (8.79)	226.3 (8.90)	8 degrees	20 m (65.6 ft)

SITRANS LR250 Flanged Horn Antenna, dimensions in mm (inch)

Dimensional drawings (continued)

Flanged Horn with Extension

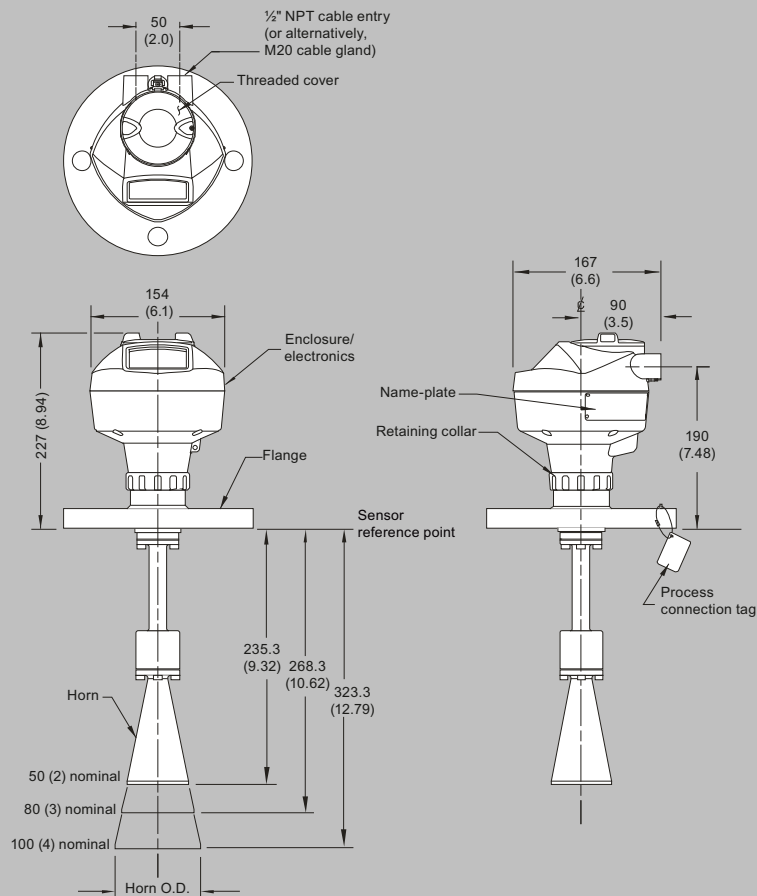

Nominal Horn Size	Horn O.D.	Height to sensor reference point		Beam angle	Measurement range
		Stainless steel flange raised or flat-faced	Optional alloy flange		
50 (2)	47.8 (1.88)	235.3 (9.26)	238.3 (9.38)	15 degrees	20 m (65.6 ft)
80 (3)	74.8 (2.94)	268.3 (10.56)	271.3 (10.68)	10 degrees	20 m (65.6 ft)
100 (4)	94.8 (3.73)	323.3 (12.73)	326.3 (12.85)	8 degrees	20 m (65.6 ft)

SITRANS LR250 Flanged Horn Antenna with extension, dimensions in mm (inch)

SITRANS LR250 Horn Antenna

Circuit diagrams

Connect the wires to the terminals as shown: the polarity is identified on the terminal block.

Gland may or may not be provided depending on approval option.

Shield for HART and PROFIBUS PA Intrinsically Safe versions only.

Hand Programmer

SIEMENS			
1	2	3	4
5	6	7	8
9	0	.	+
C	↑	↓	↔
←	↑	↓	→

Part number:
7ML1930-1BK

Notes:

1. DC terminal shall be supplied from a source providing electrical isolation between the input and output, to meet the applicable safety requirements of IEC 61010-1.
2. All field wiring must have insulation suitable for rated input voltages.
3. Use shielded twisted pair cable (14 ... 22 AWG) for HART version.
4. Separate cables and conduit may be required to conform to standard instrumentation wiring practices or electrical codes.

SITRANS LR250 connections